

Power Block 16


Order number: 77024-180-02

General usage

ipas – Power Block series, multi-functional actuators ready for high current loads! – Finally, a powerful and economic Universal Binary & Blind Actuator with output independent phases.

The Power Block range consists of 2 different actuator types. It can be installed in a standard distribution board

- only 4 DIN Rail modules for 8 outputs
- only 8 DIN Rail modules for 16 outputs

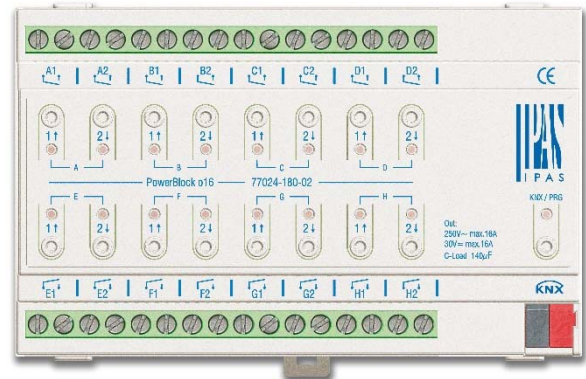

The ETS application program is extremely powerful. For simplicity:

- Most common functions are, by default, preconfigured. Basic programming becomes very easy.
- Standard parameters can be easily activated.
- Advanced parameters (very useful!) are by default hidden, but can be activated when needed.

A brief overview of the functionality is given in the following table:

| OUTPUTS | |
|-------------------------------|------------------|
| BINARY (POWER LEDs SUPPORTED) | SHUTTER / BLIND |
| Bus failure | Bus failure |
| Central ON/OFF | Central UP/DOWN |
| Counters | Limits |
| Scenes | Scenes |
| Timers | Presets |
| Alarms | Alarms |
| Disable function | Disable function |
| Manual control | Manual control |

| ADVANCED FUNCTIONS | |
|-------------------------------|---------------------------|
| Analog & digital alarms | Logic functions |
| Scene controller | Advanced scene controller |
| Timers | Setpoints |
| Overwrite end user parameters | Behaviour at bus recovery |

Power Block 16

Order number: 77024-180-02

Device type and accessories

At present the following device types are available in the Power Block control group

| Ref. | Description | Order number: |
|----------------|-----------------------|---------------|
| Power Block 8 | 8 Capacitive outputs | 77024-180-01 |
| Power Block 16 | 16 Capacitive outputs | 77024-180-02 |

Scope of delivery

The following individual components are included in the delivery of the Power Block device:

- Complete device with connected bus connector
- Operating and mounting instructions
- Delivered in break-proof individual packaging

Application programs

The following application programs are currently available for the Power Block device:

- 77014-PowerBlock o16-12-0110

For application program functions, please see the application program description.

Installation device

- Risk of death by electric shock
- The device is intended for interior installation in dry rooms.
- The device must only be installed and commissioned by an accredited electrical engineer.
- Please follow country-specific safety and accident prevention rules as well as all current KNX guide lines.
- Please follow country-specific rules and regulations for the planning and construction of installations, especially with regard to emergency lighting systems.
- For the installation the device must be switched to zero potential.
- Do not open the device! Faulty devices must be returned to the manufacturer.

Power Block 16**Order number: 77024-180-02****Technical data****POWER & OUTPUTS SPECIFICATIONS**

| | | |
|--------------------------------------|---|---|
| Power supply | Via KNX bus Max. current consumption | 21..30VDC 10mA |
| Additional supply | | No |
| Number of outputs | | 16 Dry contact (potential-free) |
| Output configuration | | Up to 16 outputs / Up to 8 channels |
| Output nominal values | AC rated current / voltage DC rated current / voltage | 16A / 250VAC 50/60Hz C-Loads max. = 140 µF 16A / 30 VDC |
| Device nominal values | Current/Voltage | 16A /250VAC per Output |
| Max. load rating per device | | 16 out. x 16A = 256A / 250VAC 50/60Hz |
| Phases switching distribution | | 1 independent phase allowed per output |
| Output life expectancy | Mechanical Electrical | > 3x10 ⁶ operations (at 60 times/min) > 4x10 ⁴ cycles with resistive load at max current |
| Connections | KNX bus connection terminal Terminal screw block Tightening torque for terminal screw | 0,8mm ² solid max. 6mm ² Ø solid maximum 0.5 Nm |

GENERAL SPECIFICATIONS


| | | |
|-------------------------------------|---|--|
| Control and display elements | Programming button LED 16 x buttons for manual channels control 16 x LEDs | To assign the physical address To switch On/Off outputs and move Up/Down channels. To display actual outputs/channels status |
| Mechanical data | Casing: Dimensions REG casing 4TE(Width/Height/Length) Weight: Mounting: | Plastic ABS – V0 60mm / 90mm / 144mm 440 gr 35mm DIN rail |
| Electrical safety | Degree of contamination: Protection type (in accordance with EN60529): Protection class (according to IEC 1140): Overvoltage category: KNX Bus: | 2 IP20 class II class III Separated extra-low voltage SELV DC 24 |
| EMC requirements | Complies with: | EN 50491-5-2 / EN 50491-5-3 |
| Environmental conditions | Clima conditions: Operation temperature: Storage temperature: Rel. humidity (non condensing): | EN 60721-3-3 class 3k5 -5°C to +45°C -25°C to +70°C 5 % to 93 % |
| Certification CE-Signage | | KNX registered According to EMC-Guidelines (Residential and commercial buildings), Low Voltage guidelines |

Power Block 16

Order number: 77024-180-02

Location and function of the LEDs and control elements

The programming button and programming LED are required for commissioning and are only accessible in the distribution box when the cover is removed.

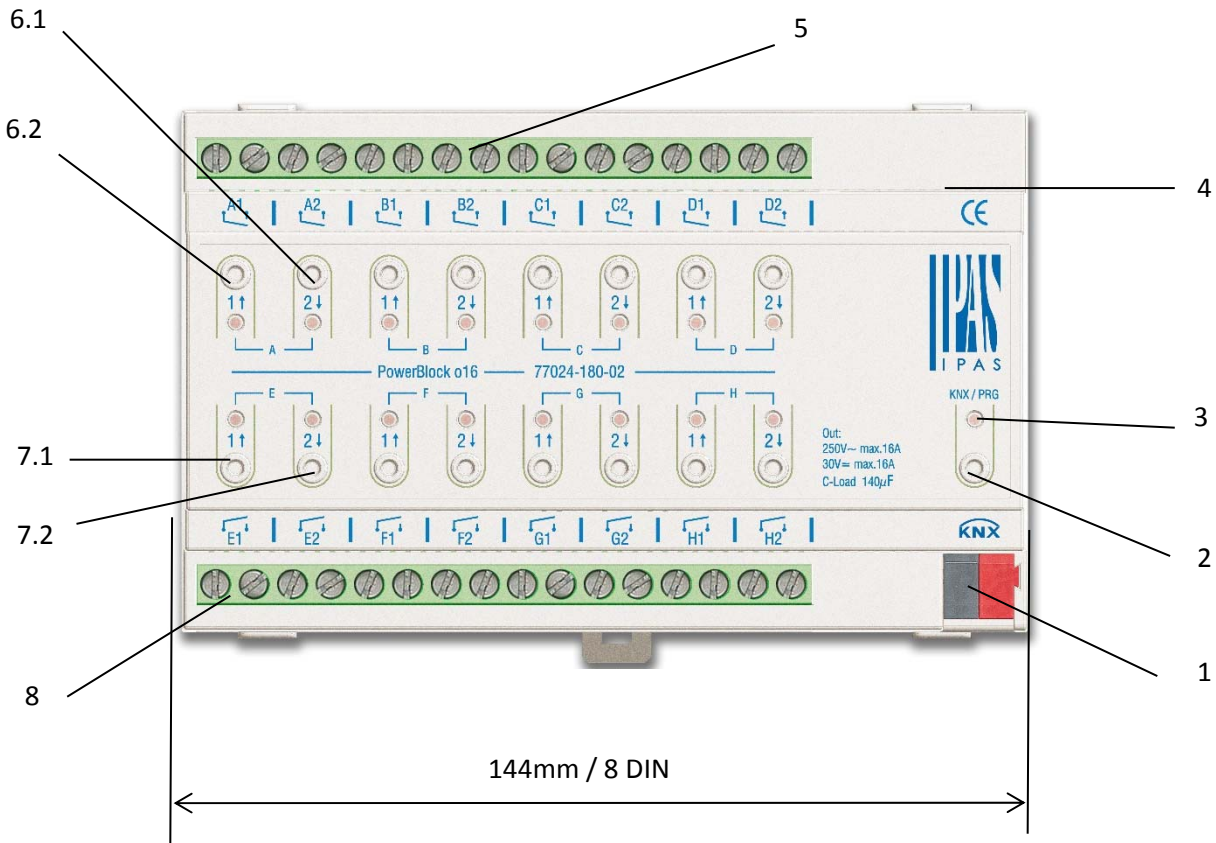

- 1: KNX bus connector
- 2: Programming button
- 3: Programming LED
- 4: SD card slot (only for internal use)
- 5: Outputs connector: Channel A,B,C,D

LED output/channel status

- 6.1: Binary channel LED ON = Output ON, LED OFF = Output OFF / Shutter: LED blinks while moving UP
- 6.2: Binary channel LED ON = Output ON, LED OFF = Output OFF / Shutter: LED blinks while moving DOWN

7.1: Manual control (See Annex 1)

- Blind channel:
 - Long press: Move Up (LED blinks while moving)
 - Short press: Stop/Step
- Binary channel:
 - Short press: Output toggles to ON/OFF

7.2: Manual control (See Annex 1)

- Blind channel:
 - Long press: Move Down (LED blinks while moving)
 - Short press: Stop/Step
- Binary channel:
 - Short press: Output toggles to ON/OFF

8: Outputs connector: Channel E,F,G,H

Power Block 16

Order number: 77024-180-02

Mounting and wiring

As an REG device, the Power Block series are suitable for mounting in distribution boxes on 35 mm DIN rails and wall boxes. To mount the device, it must be angled to slide onto the DIN rail from above and then locked into place with a downward movement.

Please make sure that the security latch at the bottom side of the device snaps into place and that the device is firmly attached to the rail. To dismount the device, the security latch can be pulled downwards with a suitable tool and then the device can be removed from the rail.


After the device has been inserted, the cables for the Outputs should be attached to the upper and lower connectors. However, please make sure that these are labelled clearly.

The power supply is connected to the bottom right-hand side connector according to the order indicated on the casing. To connect the KNX cable, a standard bus connector is plugged into the respective entry on the device. Please make sure that there is double basic insulation between the KNX installation and the power supply. To do so, please insulate the wires of the KNX cable up to the bus connector with the enclosed shrinkable tubing.

Please make sure that the cables are laid in a way that ensures sufficient distance between the inputs and outputs cables

OUTPUTS SCHEMATIC

Each channel can be configured to be used as 2 binary outputs or as one blind channel. Each output can be powered by an independent phase.

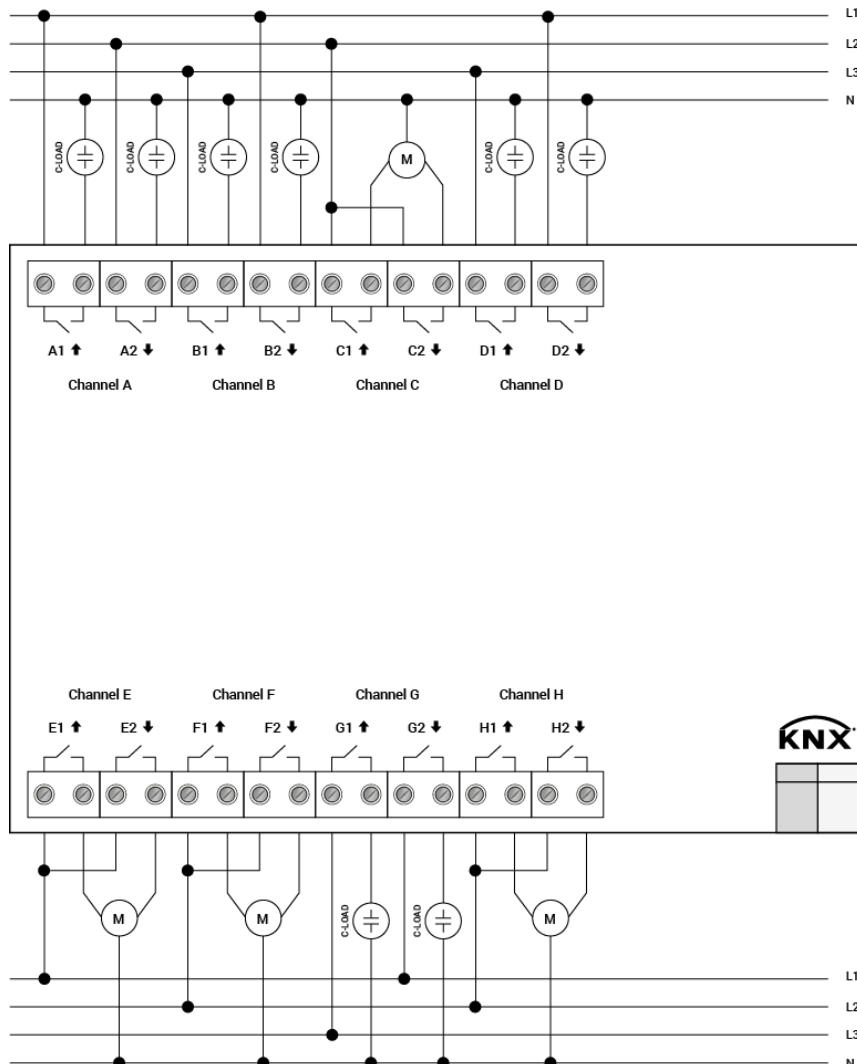




Power Block 16

Order number: 77024-180-02

ANNEX 1: MANUAL CONTROL

The Power Block actuator has 2 push buttons and 2 status LEDs for each channel on the front side:

- These buttons can be activated to control each and every channel/output individually if you select “yes” in the relevant parameter options in Binary outputs and/or Shutter/Blinds.
- The LEDs are arranged in two rows, whereas the LEDs represent:
 - o For Binary outputs:
 - The top row: channels A1, A2, B1, B2, C1, C2, D1, D2
 - The bottom row: channels E1, E2, F1, F2, G1, G2, H1, H2.
 - o For Shutter/blinds:
 - The top row: channel’s first relay A1->UP, A2->DOWN, B1-UP, etc.
 - The bottom row: channel’s second relay E1->UP, E2-> DOWN, F1-> UP, etc.

| MANUAL CONTROL – PARAMETER MODE | |
|--|--|
| <p>The Parameter Mode allows you to control all the channels of the actuator as configured in the ETS.</p> <p>The Action simulates a telegram received at the switching object of the selected channel.</p> | |
| BINARY | SHUTTER/BLIND |
| <p>Press action: Sends Toggle ON/OFF command “0/1” to the “Switching” object</p> <div style="display: flex; flex-direction: column; align-items: flex-start;"> <div style="display: flex; align-items: center; margin-bottom: 5px;">  LED = ON (indicates channel status) </div> <div style="display: flex; align-items: center;">  LED = OFF (indicates channel status) </div> </div> | <ul style="list-style-type: none"> - <u>Long press action (Channel output 1)</u>: Sends a UP command “0” to the “Move” object. - <u>Long press action (Channel output 2)</u>: Sends a DOWN command “1” to the “Move” object. - <u>Short press action (any output)</u> (while shutter/blind is moving) of same button: sends a Stop command to the “Stop...” object. <div style="display: flex; align-items: center; margin-top: 10px;">  LED blinks while moving UP/DOWN during parameterized time </div> |

Power Block 16

Order number: 77024-180-02

MANUAL CONTROL – TEST MODE


The Test Mode allows you to test all the loads/wiring connected to the channels. It is independent from the ETS configuration of the actuator (since the "Manual Control / Param mode + Test mode" is a default option, you can use the Test mode even before programming the actuator).

Important note: Should a blind/shutter be connected to a channel, the 2 channels may never be closed at the same time. Therefore, even in Test mode, if the channel is configured as a blind, this safety measure is implemented. For this reason, it is better to first commission the OUTPUT: CHANNEL TYPE SELECTION before using the Test mode.





To change into the test mode, any button can be used depending of the channel configuration:

- If "Binary" channel is configured: Press any button for at least 500ms
- If "Blind" channel is configured: Press the two buttons of any channel at the same time for at least 500ms

To change back to the normal "Parameter Mode" the same procedure should be repeated. Be aware by changing back to "Parameter Mode" the device will restart. Also after the device has restarted and if the channel is configured to be a blind channel, it will do a calibration movement on the first movement command.

 In order to indicate that the actuator is in Manual Control / Test Mode, the LED of the selected channel is continuously making a short blinking action every second; no matter whether the channel is ON (LED ON) or OFF (LED OFF).

The Action switches/moves the channel, as you can see in the table below:

| BINARY | SHUTTER/BLIND |
|--|---|
| <ul style="list-style-type: none"> - <u>Press action:</u> Sends toggle ON/OFF command to the relay (ON = Contact closed / OFF = Contact open)  LED = ON (indicates channel status)  LED = OFF (indicates channel status) | <ul style="list-style-type: none"> - <u>Rising edge press action (Channel X):</u> Contact closed - <u>Falling edge press action (Channel X):</u> Contact open  LED = ON (indicates channel status)  LED = OFF (indicates channel status) |